

P/N :RM60B2140M43

1. FEATURES


High Performance
 High Reliability
 SMD Type
 RoHS Compliant

2. Electrical Specifications

ITEM	In >>> Out	
Center frequencies	2140	MHz
Band width	60	MHz
Insertion Loss	2.0	dB max.
Ripple	0.7	dB max.
Return Loss	15.0	dB min.
Attenuation	1980 MHz	38 dB min.
	2045 MHz	20 dB min.
Input Power	3 W max.	
In/Out Impedance	50 ohm	
Temperature range	-30 ~ +85	



3. Mechanical Specifications

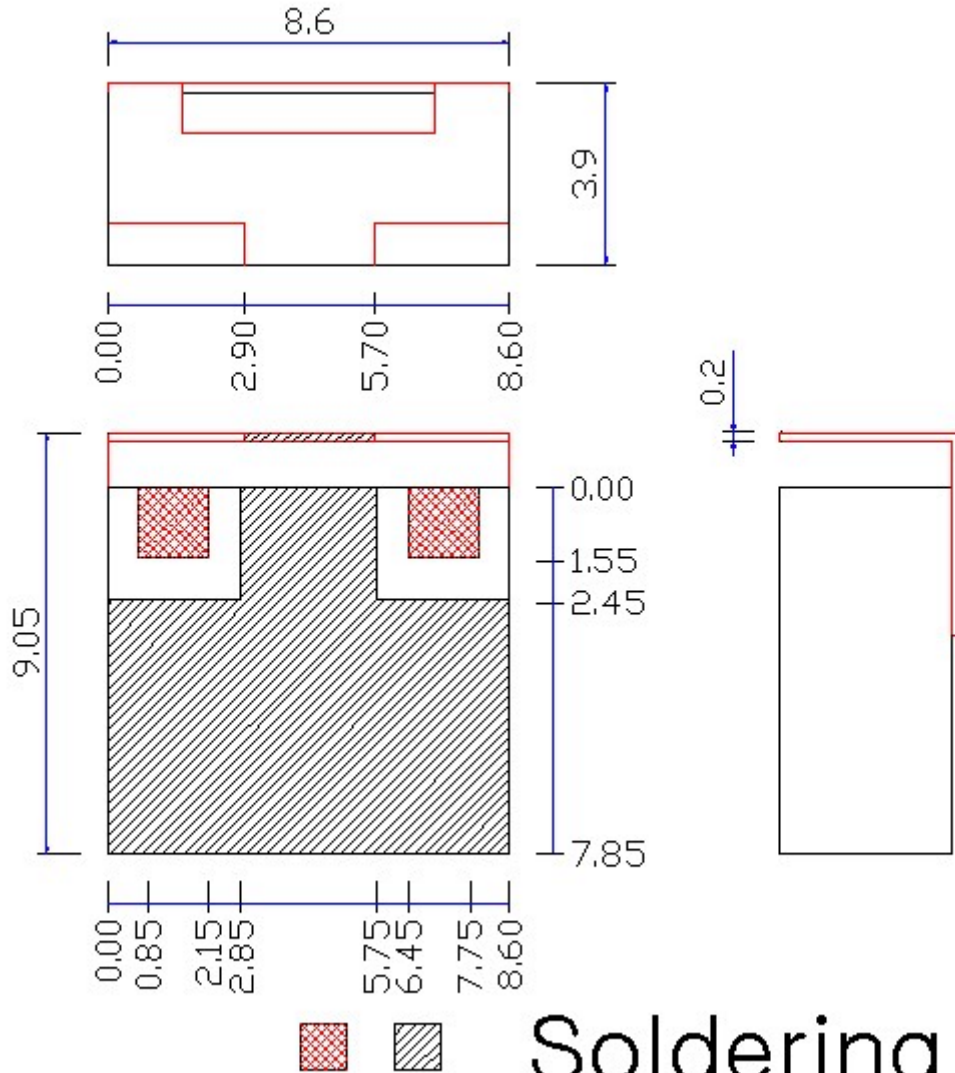

Soldering

